




Semifinal Exam

DO NOT DISTRIBUTE THIS PAGE

Important Instructions for the Exam Supervisor

- This examination consists of three parts.
- Part A has four questions and is allowed 90 minutes.
- Part B has two questions and is allowed 90 minutes.
- Part C has one question and is allowed 20 minutes. The answer for Part C will *not* be used for team selection, but will be used for special recognition from the Optical Society of America.
- The first page that follows is a cover sheet. Examinees may keep the cover sheet for all three parts of the exam.
- The three parts are then identified by the center header on each page. Examinees are only allowed to do one part at a time, and may not work on other parts, even if they have time remaining.
- Allow 90 minutes to complete Part A. Do not let students look at Part B or Part C. Collect the answers to Part A before allowing the examinee to begin Part B. Examinees are allowed a 10 to 15 minutes break between parts A and B.
- Allow 90 minutes to complete Part B. Do not let students look at Part C or go back to Part A. Collect the answers to part B before allowing the examinee to begin Part C. Examinees are allowed a 10 to 15 minutes break between Parts B and C.
- Allow 20 minutes to complete Part C. This part is optional; scores on Part C will not be used to select the US Team. Examinees may not go back to Part A or B.
- Ideally the test supervisor will divide the question paper into 4 parts: the cover sheet (page 2), Part A (pages 3-7), Part B (pages 8-10), and Part C (page 11). Examinees should be provided the parts individually, although they may keep the cover sheet.
- The supervisor *must* collect all examination questions, including the cover sheet, at the end of the exam, as well as any scratch paper used by the examinees. Examinees may *not* take the exam questions. The examination questions may be returned to the students after March 31, 2008.
- Examinees are allowed calculators, but they may not use symbolic math, programming, or graphic features of these calculators. Calculators may not be shared and their memory must be cleared of data and programs. Cell phones, PDA's or cameras may not be used during the exam or while the exam papers are present. Examinees may not use any tables, books, or collections of formulas.
- Please provide the examinees with graph paper for Part A.

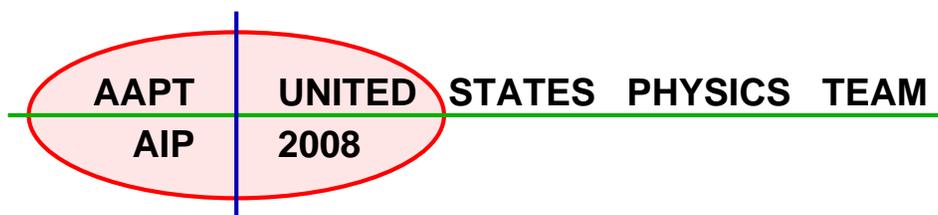

Semifinal Exam

INSTRUCTIONS

DO NOT OPEN THIS TEST UNTIL YOU ARE TOLD TO BEGIN

- Work Part A first. You have 90 minutes to complete all four problems. Each question is worth 25 points. Do not look at Parts B or C during this time.
- After you have completed Part A you may take a break.
- Then work Part B. You have 90 minutes to complete both problems. Each question is worth 50 points. Do not look at Parts A or C during this time.
- Show all your work. Partial credit will be given. Do not write on the back of any page. Do not write anything that you wish graded on the question sheets.
- Start each question on a new sheet of paper. Put your school ID number, your name, the question number and the page number/total pages for this problem, in the upper right hand corner of each page. For example,

School ID #

Doe, Jamie

A1 - 1/3

- A hand-held calculator may be used. Its memory must be cleared of data and programs. You may use only the basic functions found on a simple scientific calculator. Calculators may not be shared. Cell phones, PDA's or cameras may not be used during the exam or while the exam papers are present. You may not use any tables, books, or collections of formulas.
- Questions with the same point value are not necessarily of the same difficulty.
- Part C is an optional part of the test. You will be given 20 additional minutes to complete Part C. Your score on Part C will not affect the selection for the US Team, but can be used for special prizes and recognition to be awarded by the Optical Society of America.
- **In order to maintain exam security, do not communicate any information about the questions (or their answers/solutions) on this contest until after March 31, 2008.**

Possibly Useful Information. You may use this sheet for all three parts of the exam.

$$g = 9.8 \text{ N/kg}$$

$$k = 1/4\pi\epsilon_0 = 8.99 \times 10^9 \text{ N} \cdot \text{m}^2/\text{C}^2$$

$$c = 3.00 \times 10^8 \text{ m/s}$$

$$N_A = 6.02 \times 10^{23} \text{ (mol)}^{-1}$$

$$\sigma = 5.67 \times 10^{-8} \text{ J}/(\text{s} \cdot \text{m}^2 \cdot \text{K}^4)$$

$$1\text{eV} = 1.602 \times 10^{-19} \text{ J}$$

$$m_e = 9.109 \times 10^{-31} \text{ kg} = 0.511 \text{ MeV}/c^2$$

$$\sin \theta \approx \theta - \frac{1}{6}\theta^3 \text{ for } |\theta| \ll 1$$

$$G = 6.67 \times 10^{-11} \text{ N} \cdot \text{m}^2/\text{kg}^2$$

$$k_m = \mu_0/4\pi = 10^{-7} \text{ T} \cdot \text{m}/\text{A}$$

$$k_B = 1.38 \times 10^{-23} \text{ J/K}$$

$$R = N_A k_B = 8.31 \text{ J}/(\text{mol} \cdot \text{K})$$

$$e = 1.602 \times 10^{-19} \text{ C}$$

$$h = 6.63 \times 10^{-34} \text{ J} \cdot \text{s} = 4.14 \times 10^{-15} \text{ eV} \cdot \text{s}$$


$$(1+x)^n \approx 1+nx \text{ for } |x| \ll 1$$

$$\cos \theta \approx 1 - \frac{1}{2}\theta^2 \text{ for } |\theta| \ll 1$$


Part A

Question A1


Four square metal plates of area A are arranged at an even spacing d as shown in the diagram. (Assume that $A \gg d^2$.)

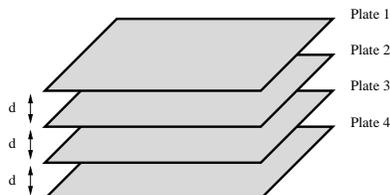


Plates 1 and 4 are first connected to a voltage source of magnitude V_0 , with plate 1 positive; plates 2 and 3 are then connected together with a wire. The wire is subsequently removed. Finally, the voltage source attached between plates 1 and 4 is replaced with a wire. The steps are summarized in the diagrams below.



Step 1



Step 2




Step 3

Find the resulting potential difference ΔV_{12} between plates 1 and 2; like wise find ΔV_{23} and ΔV_{34} , defined similarly.

Assume, in each case, that a positive potential difference means that the top plate is at a higher potential than the bottom plate.

Question A2

A simple heat engine consists of a moveable piston in a cylinder filled with an ideal monatomic gas. Initially the gas in the cylinder is at a pressure P_0 and volume V_0 . The gas is slowly heated at constant volume. Once the pressure reaches $32P_0$ the piston is released, allowing the gas to expand so that no heat either enters or escapes the gas as the piston moves. Once the pressure has returned to P_0 the outside of the cylinder is cooled back to the original temperature, keeping the pressure constant. For the monatomic ideal gas you should assume that the molar heat capacity at constant volume is given by $C_V = \frac{3}{2}R$, where R is the ideal gas constant. You may express your answers in fractional form or as decimals. If you choose decimals, keep three significant figures in your calculations. The diagram below is not necessarily drawn to scale.

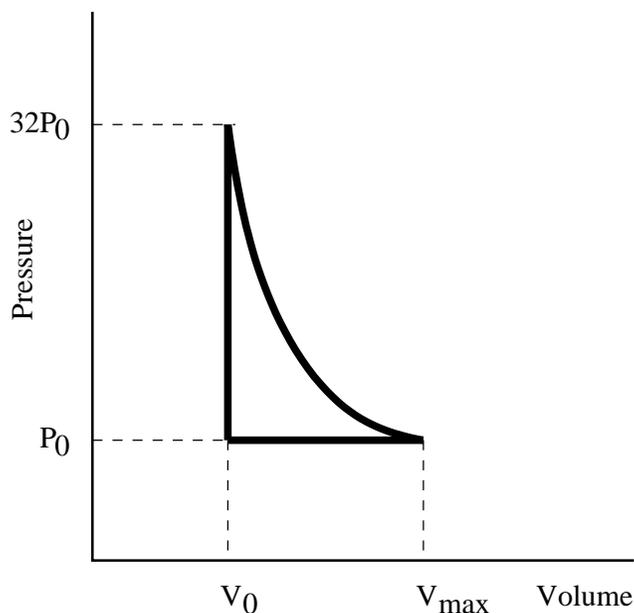

- Let V_{\max} be the maximum volume achieved by the gas during the cycle. What is V_{\max} in terms of V_0 ? *If you are unable to solve this part of the problem, you may express your answers to the remaining parts in terms of V_{\max} without further loss of points.*
- In terms of P_0 and V_0 determine the heat added to the gas during a complete cycle.
- In terms of P_0 and V_0 determine the heat removed from the gas during a complete cycle.
- What is the efficiency of this cycle?

Question A3

A certain planet of radius R is composed of a uniform material that, through radioactive decay, generates a net power P . This results in a temperature differential between the inside and outside of the planet as heat is transferred from the interior to the surface.

The rate of heat transfer is governed by the thermal conductivity. The thermal conductivity of a material is a measure of how quickly heat flows through that material in response to a temperature gradient. Specifically, consider a thin slab of material of area A and thickness Δx where one surface is hotter than the other by an amount ΔT . Suppose that an amount of heat ΔQ flows through the slab in a time Δt . The thermal conductivity k of the material is then

$$k = \frac{\Delta Q}{\Delta t} \frac{1}{A} \frac{\Delta x}{\Delta T}.$$

It is found that k is approximately constant for many materials; assume that it is constant for the planet.

For the following assume that the planet is in a steady state; temperature might depend on position, but does not depend on time.

- Find an expression for the temperature of the surface of the planet assuming blackbody radiation, an emissivity of 1, and *no* radiation incident on the planet surface. You may express your answer in terms of any of the above variables and the Stephan-Boltzmann constant σ .
- Find an expression for the temperature difference between the surface of the planet and the center of the planet. You may express your answer in terms of any of the above variables; you do *not* need to answer part (a) to be able to answer this part.

Question A4

A tape recorder playing a single tone of frequency f_0 is dropped from rest at a height h . You stand directly underneath the tape recorder and measure the frequency observed as a function of time. Here $t = 0$ s is the time at which the tape recorder was dropped.

t (s)	f (Hz)
2.0	581
4.0	619
6.0	665
8.0	723
10.0	801

The acceleration due to gravity is $g = 9.80$ m/s² and the speed of sound in air is $v_{\text{snd}} = 340$ m/s. Ignore air resistance. You might need to use the Doppler shift formula for co-linear motion of sources and observers in still air,

$$f = f_0 \frac{v_{\text{snd}} \pm v_{\text{obs}}}{v_{\text{snd}} \pm v_{\text{src}}}$$

where f_0 is the emitted frequency as determined by the source, f is the frequency as detected by the observer, and v_{snd} , v_{src} , and v_{obs} are the speed of sound in air, the speed of the source, and the speed of the observer. The positive and negative signs are dependent upon the relative directions of the motions of the source and the observer.

- Determine the frequency measured on the ground at time t , in terms of f_0 , g , h , and v_{snd} . Consider only the case where the falling tape recorder doesn't exceed the speed of sound v_{snd} .
- Verify graphically that your result is consistent with the provided data.
- What (numerically) is the frequency played by the tape recorder?
- From what height h was the tape recorder dropped?


STOP: Do Not Continue to Part B

If there is still time remaining for Part A, you should review your work for Part A, but do not continue to Part B until instructed by your exam supervisor.

Part B

Question B1


A platform is attached to the ground by an ideal spring of constant k ; both the spring and the platform have negligible mass; assume that your mass is m_p . Sitting on the platform is a rather large lump of clay of mass $m_c = rm_p$, with r some positive constant that measures the ratio m_c/m_p . You then gently step onto the platform, and the platform settles down to a new equilibrium position, a vertical distance D below the original position. Throughout the problem assume that you never lose contact with the platform.

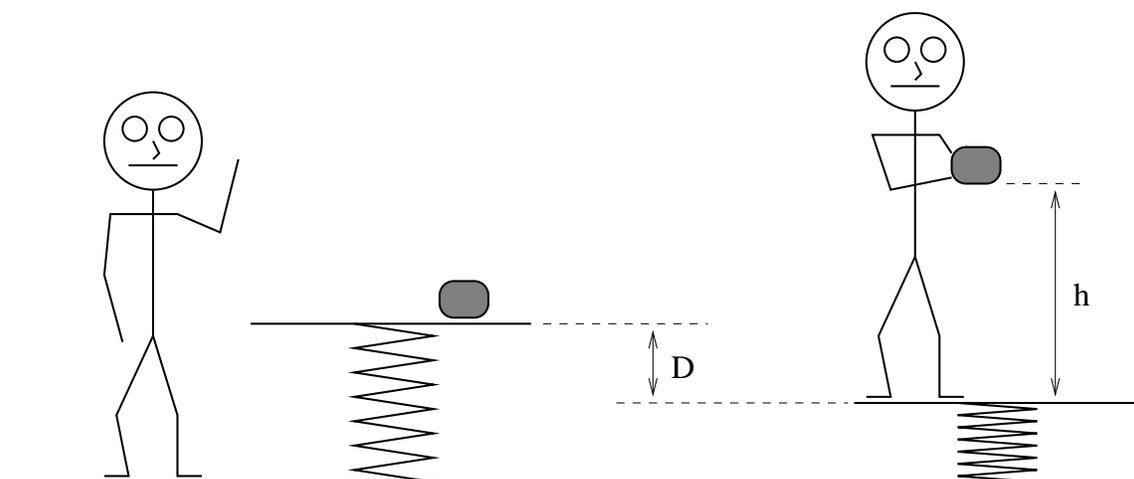

- You then slowly pick up the lump of clay and hold it a height h above the platform. Upon releasing the clay you and the platform will oscillate up and down; you notice that the clay strikes the platform after the platform has completed exactly one oscillation. Determine the numerical value of the ratio h/D .
- Assume the resulting collision between the clay and the platform is completely inelastic. Find the ratio of the amplitude of the oscillation of the platform after the collision (A_f) to the amplitude of the oscillations of the platform before the collision (A_i). Determine A_f/A_i in terms of the mass ratio r and any necessary numerical constants.
- Sketch a graph of the position of the platform as a function of time, with $t = 0$ corresponding to the moment when the clay is dropped. Show one complete oscillation *after* the clay has collided with the platform. It is not necessary to use graph paper.
- The above experiment is only possible if the mass ratio r is less than some critical value r_c . Otherwise, despite the clay having been dropped from the height determined in part (a), the oscillating platform will hit the clay before the platform has completed one full oscillation. On your graph in part (c) sketch the position of the clay as a function of time relative to the position of the platform for the mass ratio $r = r_c$.

Question B2

Consider a parallel plate capacitor with the plates vertical. The plates of the capacitor are rigidly supported in place. The distance between the plates is d . The plates have height h and area $A \gg d^2$. Assume throughout this problem that the force of air resistance may be neglected; however, the force of gravity cannot be neglected. Neglect any edge effects as well as any magnetic effects.

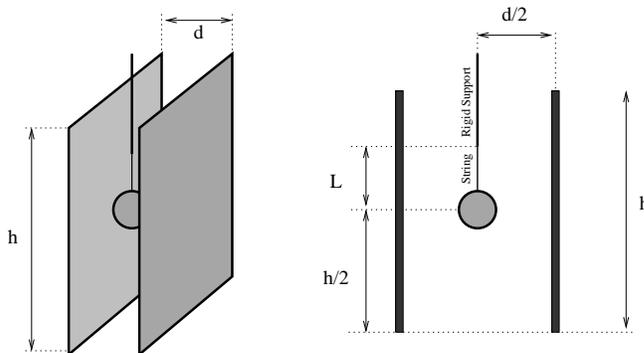


- a. A small metal ball with a mass M and a charge q is suspended from a string of length L that is tied to a rigid support. When the capacitor is not charged, the metal ball is located at the center of the capacitor— at a distance $d/2$ from both plates and at a height $h/2$ above the bottom edge of the plates. If instead a constant potential difference V_0 is applied across the plates, the string will make an angle θ_0 to the vertical when the metal ball is in equilibrium.
 - i. Determine θ_0 in terms of the given quantities and fundamental constants.
 - ii. The metal ball is then lifted until it makes an angle θ to the vertical where θ is only slightly greater than θ_0 . The metal ball is then released from rest. Show that the resulting motion is simple harmonic motion and find the period of the oscillations in terms of the given quantities and fundamental constants.
 - iii. When the ball is at rest in the equilibrium position θ_0 , the string is cut. What is the maximum value for V_0 so that the ball will *not* hit one of the plates before exiting? Express your answer in terms of the given quantities and fundamental constants.
- b. Suppose instead that the ball of mass M and charge q is released from rest at a point halfway between the plates at a time $t = 0$. Now, an AC potential difference $V(t) = V_0 \sin \omega t$ is also placed across the capacitor. The ball may hit one of the plates before it falls (under the influence of gravity) out of the region between the plates. If V_0 is sufficiently large, this will only occur for some range of angular frequencies $\omega_{\min} < \omega < \omega_{\max}$. You may assume that $\omega_{\min} \ll \sqrt{g/h}$ and $\omega_{\max} \gg \sqrt{g/h}$. Making these assumptions, find expressions for ω_{\min} and ω_{\max} in terms of the given quantities and/or fundamental constants.
- c. Assume that the region between the plates is not quite a vacuum, but instead humid air with a uniform resistivity ρ . Ignore any effects because of the motion of the ball, and assume that the humid air doesn't change the capacitance of the original system.
 - i. Determine the resistance between the plates.
 - ii. If the plates are originally charged to a constant potential source V_0 , and then the potential is removed, how much time is required for the potential difference between the plates to decrease to a value of V_0/e , where $\ln e = 1$?
 - iii. If the plates are instead connected to an AC potential source so that the potential difference across the plates is $V_0 \sin \omega t$, determine the amplitude I_0 of the alternating current through the potential source.

STOP: Do Not Continue to Part C

If there is still time remaining for Part B, you should review your work for Part B, but do not continue to Part C until instructed by your exam supervisor. You may *not* return to Part A

Optical Society of America Bonus Question

Researchers have developed a lens made of liquid. The spherical lens consists of a droplet of transparent liquid resting on an electrically controllable surface. When the voltage of the surface is changed, the droplet itself changes shape; it either tries to “ball-up” more strongly or it becomes flatter. The figure below is a sketch of the liquid lens and several parameters that describe it, including the thickness of the lens (t), the radius of curvature of the top surface (R) and the contact angle (θ), which represents the angle between the flat surface beneath the droplet and the tangent to the curved surface at the point of contact.

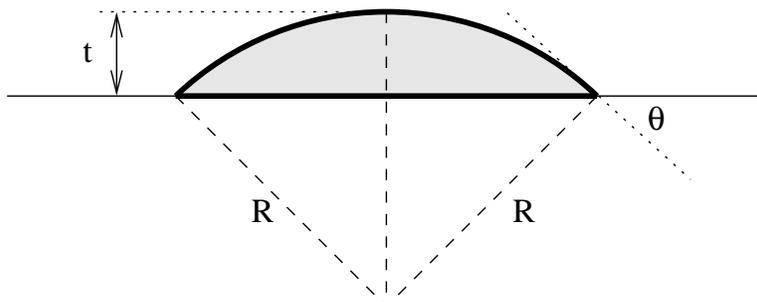

- When a certain voltage is applied, both the contact angle and lens thickness increase (and the lens becomes more curved). In this case, is the liquid attracted or repelled by the surface?
- Express the contact angle as a function of R and t .
- The total volume of the liquid lens is an important parameter because as the liquid lens changes shape, its volume is conserved. Calculate the volume of the lens as a function of R and t .
- Use your result to part (b) to eliminate the variable t from your expression for the volume and find $V(R, \theta)$.
- By changing the voltage on the control surface, the contact angle, θ , can be changed, which in turn changes the focal length of the lens, f . The lensmaker's formula can be used to calculate the focal length and is given by

$$\frac{1}{f} = (n_{\text{liquid}} - n_{\text{air}}) \left(\frac{1}{R_1} - \frac{1}{R_2} \right),$$

where n_{liquid} and n_{air} are the refractive indices of the liquid in the lens and air around it, and R_1 and R_2 are the radii of curvature of the two surfaces of the lens. In figure 1, R_1 is the curved face and R_2 is the flat face. Use the lensmaker's formula to calculate the focal length of the lens in terms of the total volume of the liquid, the contact angle, and the relevant refractive indices.

Sidenote: liquid lenses are interesting because they are electrically controllable, variable focus lenses that can be very compact. People are working on putting them into cell phone cameras for ultra-compact zoom lenses. For more information on this type of liquid lens, see T. Krupenkin, S. Yang, and P. Mach, “Tunable liquid microlens,” *Appl. Phys. Lett.* 82, 316-318 (2003).